



TRENCHER



FEATURES:

- Built for skid steers and loaders with the universal mount
- The Trenchers are ideal for fast and effective trenching in almost any working environment
- All models feature a very durable 50,000 lbs digging chain
- Removable double-flighted spoil auger easily removes excess dirt away from trench opening
- Units are outfitted with a self-aligning boom and a grease cylinder tensioning system
- Maintenance free tapered roller bearings in the boom end reduces bearing load, increases chain life and virtually eliminates lock up
- Units feature our industry leading long life boom roller bearing design
- Trenchers are designed to handle high operating pressure capacities
- Unit allows for excellent visibility, trench starting and digging capability
- Trenchers dig to there posted digging depth at 60 degree angle, this makes the trencher operate very efficiently and allows the operator to exceed the posted dig depth if required by 6" to 8" inches
- Digging Depths from 24" to 60" inches and chain widths from 4" to 12" are available
- 1/2 rock and 1/2 frost digging chains are standard on all trencher (other teeth available)
- Trench cleaning / crumber kit is standard on all trenchers for added control and better trench bed finish
- Trencher can be manually side shifted
- Heavy duty construction for long lasting service
- Durable black paint finish



1/2 Rock 1/2 Frost Digging Teeth

All Models include a Trench Cleaner / Crumber to level out the bottom of the trench



OPTIONS:

- Double Standard, 1/2 Rock and 1/2 Frost, and Full Rock & Frost chains are all available
- Hydraulic side shift



All products are subject to change without notice or liability.

Toll Free: 1-877-947-2882
www.conterraindustries.com

Box 59, Rockyford, Alberta Canada T0J 2R0
 Ph: (403) 947-2882 Fax: (403) 947-2892


E6



Manual Side Shift allows for trenching again obstacles



Heavy Duty Direct Drive eliminates chain reduction and decreases moving parts

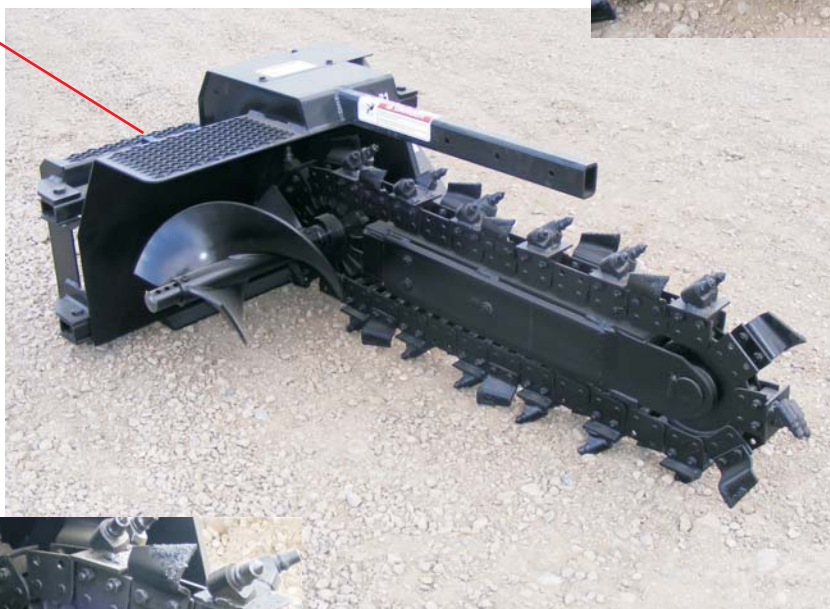

Serviceable Main Drive Shaft



Spoil Auger moves material to one side of the trench and away from trench opening



50,000 lbs. Digging Chain ... the best in the business



All products are subject to change without notice or liability.

Toll Free: 1-877-947-2882
www.conterraindustries.com

Box 59, Rockyford, Alberta Canada T0J 2R0
Ph: (403) 947-2882 Fax: (403) 947-2892



E7

PRINTED IN CANADA



Double Standard - recommended for hard, drier soil, has roughly twice the number of teeth



1/2 Rock & 1/2 Frost - recommended for harder soils and mixed rocky digging conditions



Full Rock & Frost - recommended for hard, or frost and rock

SPECIFICATIONS:

Part #	Model #	Trench Depth	Trench Width	Type of Chain	Hydraulic Flow GPM	Speed Range @ Low to Max Flow (a) (feet per minute)	Theoretical Torque ft/lbs	Weight
401000	TR-XR7-36x6DS	36"	6"	DS	8 to 20	192 ft. to 337ft.	908 to 1362	
402000	TR-XR21-36x6DS	36"	6"	DS	13 to 25	212 ft. to 408ft.	908 to 1362	
402001	TR-XR21-36x6R/F	36"	6"	R/F	13 to 25	212 ft. to 408ft.	908 to 1362	
402002	TR-XR21-36x6FRF	36"	6"	FRF	13 to 25	212 ft. to 408ft.	908 to 1362	
402003	TR-XR21-48x6DS	48"	6"	DS	13 to 25	212 ft. to 408ft.	908 to 1362	
402004	TR-XR21-48x6R/F	48"	6"	R/F	13 to 25	212 ft. to 408ft.	908 to 1362	
402005	TR-XR21-48x6FRF	48"	6"	FRF	13 to 25	212 ft. to 408ft.	908 to 1362	
403000	TR-XR35-48x6DS	48"	6"	DS	20 to 40	222 ft. to 444 ft.	1475 to 2950	
403001	TR-XR35-48x6R/F	48"	6"	R/F	20 to 40	222 ft. to 444 ft.	1475 to 2950	
403002	TR-XR35-48x6FRF	48"	6"	FRF	20 to 40	222 ft. to 444 ft.	1475 to 2950	

(a) Trench Speed Range is based on digging a 24" deep trench 6" wide in loam

Chains:
 DS - Double Standard
 R/F - 1/2 Rock 1/2 Frost
 FRF - Full Rock & Frost

* The above numbers reflect the capacity of the attachment, not the skid steer. Please refer to your owners manual of your skid steer for lift capacities and hydraulic flow capabilities.



All products are subject to change without notice or liability.

Toll Free: 1-877-947-2882
www.conterraindustries.com

Box 59, Rockyford, Alberta Canada T0J 2R0
 Ph: (403) 947-2882 Fax: (403) 947-2892

E8