

Arena Roller Side-Wind Jack
Rear Roller can be replaced by a Rear Comb

Easy-to-Read Depth Gauge

Depth Control Top-Wind Jack

No Scuff Wall Wheel

Adjustable Pull Hitch

Rear Levelling Bar
Wide Floatation Tires With Easy-Lube Hubs


Front Levelling Bar

3/8" Thick AR400 Arena Tine



Wall Wheel to help navigate your arena. Mount on left or right; front or back.

Tires are located inside the frame and behind the tines for optimal grooming coverage.

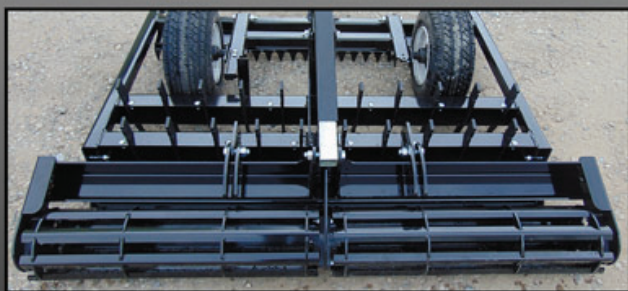

Rear Roller to increase ground stability.

Model	Recommended Power	Width	Length
CEQG-QD 52	250 - 350cc / 15 - 20hp	52"	79"
CEQG-QD 64	350 - 500 cc / 20 - 30hp	64"	79"
CEQG-QD 76	500cc+ / 30hp+	76"	79"

FEATURES:

- The Conterra EquiGroomer-QD is designed to be pulled with an ATV, UTV, Garden or Compact Tractor.
- With cutting depths from 0" to 3" in conjunction with tines spacings of 2-5/8" the EquiGroomer-QD offers superior subsurface preparation.
- Comes standard with a rear roller, however can be fitted with a Rear Comb if additional levelling is desired.
- Conterra's Revolutionary Depth Control System allows you to easily and quickly adjust both your grooming depth and rear roller in seconds using the Top and Side-Wind Jacks.
- The Easy-to-Read Depth Gauge shows you how deep you're grooming, allowing you to adjust as required, or re-set your groomer at the same depth every use.
- The Rear Roller is split into two sections to ensure excellent footing stabilization and reduced "roller skid" around corners.
- The Front and Rear Levelling Bars enable the groomer to float and level any surface. This system automatically adjusts to surface conditions on the fly.
- Arena Tines are laser cut from 3/8" Hardened AR400 Steel. As the tines wear they can be repositioned downward three mount holes, dramatically increasing operation life. When the time comes, tines are easily replaced, simply by removing a 3/8" bolt and a retainer clip.
- Both the Front and Rear Levelling Bars are laser cut from 3/8" plate steel and easily replaced.
- Frame is constructed from laser cut 1/4" steel plate and 2" x 2" square tube cross braces for years of dependable service.
- The No Scuff Wall Wheel helps the operator navigate the arena and can be mounted at the front or rear on either side.
- Wide Floatation Tires are mounted on 1000lb axles with Easy-Lube hubs to ensure a long life and smooth ride.
- The EquiGroomer-QD is available in size widths of 52", 64", and 76".
- Powder Coat finish.